




- Radio frequency signal repeater
- This signal repeater is used to extend the range between the controller and unit by up to 200 meters.
- It is designed to transmit a signal to up to 20 units.
- Thanks to the socket design, installation is simple by direct insertion into the existing socket, the throughsocket function remains unchanged.
- Indication:
  - green LED - supply voltage
  - red LED - active status (receiving and transmitting an RF signal)
- Programming is performed by a button.
- Communication frequency with bidirectional protocol iNELS RF Control.

Technical parameters		RFRP-20/230V	RFRP-20/120V
Supply voltage:	230 - 250 V / 50-60 Hz		120 V AC / 60 Hz
Apparent input:	6 VA		
Dissipated power:	0.7 W		
Transmitter frequency:	866 MHz, 868 MHz, 916 MHz		
Range in free space:	up to 200 m		
Minimum control distance:	20 mm		
Programming:	button - green LED / red LED		
Other data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70°C		
Mounting:	plug into a socket		
Protection:	IP20 Device		
Dimensions:	60 x 120 x 80 mm		
Weight:	225 g		
Related standards:	EN 607 30-1 ED.2		

- Produced in 5 designs of sockets and plugs:

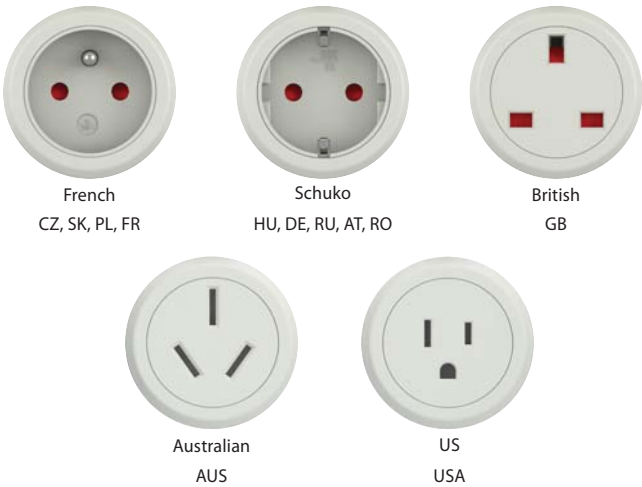

Controlling up to 20 actuators

